


Scalewatcher™ Commercial for indoor use



Enclosure type: CM

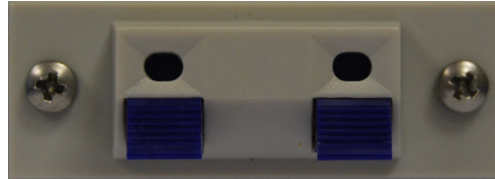

Spring connector

Markets:

The **Scalewatcher™** Commercial range is special designed for hotels, bars, restaurants, sauna, laundries, buildings, bakeries and anywhere where potable water is used. Only to be used inside.

Model	Diameter
CM2	54 mm
CM4	100 mm

Technical specifications

Supply voltage	110-240 V 50/60 Hz
Energy consumption	Less than 13 Watt/hour
Application Voltage	12 V DC
Coil cable	16AWG /1.5 mm ²
Maximum Coil Temperature	140 °F (60 °C)
Capable of driving	2 coils double layer
Enclosure material:	ABS
Maximum enclosure temperature	140 °F (60 °C)
Minimum enclosure temperature	14 °F (-10 °C)
Protection rate	NEMA2 (IP54)
Weight packed	51.8 OZ (1.8 kg)
Dimension packed	9.6"x8.8"x3.9" 245x223x100 mm ³
Weight unit	32 OZ (0.9 kg)
Dimension (WxDxH)	7.8"x4.5"x2.5" 200x115x64 mm ³

Scalewatcher™ Commercial Weatherproof



Enclosure type: CMN

Markets:

The **Scalewatcher™** Commercial range intended use is for hotels, bars, restaurants, saunas, laundries, buildings, bakeries and anywhere where potable water is used. Especially to be used where the environment is high in humidity or for outside use.

Model	Diameter
CMN2	54 mm
CMN4	100 mm
CMN8	200 mm

Technical specifications

Supply voltage	110-230 V 50/60 Hz
Energy consumption	Less than 33 Watt/hour
Overload protection	Internal fuse (2 A) 20x5 mm ²
Capable of driving	2 coils in series or double stacked
Coil cable	Three core: 0.75 mm ² Outer diameter 7 mm
Maximum Coil Temperature	230°F/ 110 °C
Maximum ambient temperature	122°F/ 50°C
For pipe sizes up to	8"/200 mm
Enclosure material	Aluminum
Protection rate	NEMA3R/IP56
Weight unpacked	6.6 lbs/3 kG
Dimension unpacked	7.9"x7.9"x2.4" 200 x 200 x 61 mm ³